

3-axis Keyboard Controller (K76-03)




Features:

- ◆ Support DVR protocol and all kinds of matrix.
- ◆ Support 4 keyboards linkage, each keyboard can support 32pcs domes at most.
- ◆ Expediently and comfortably use according to ergonomics design.
- ◆ LCD with back-light can display command menu, protocol, current camera ID, output display ID and joystick status.
- ◆ Three axis joystick can control speed of pan/tilt and zoom in/out.
- ◆ Built-in multi-protocols; Baud rate can be selected.
- ◆ Connect with common security&protection equipment and control equipment such as DVR, matrix and picture division equipment etc.
- ◆ Support all shortcut key of dome to handle.
- ◆ Alarm trigger and alarm action can be set.
- ◆ English or Chinese menu can be selected.

Specification

Model	K7-976-XXX
Power	Power supply: 9V-12V AC/DC
	Power consumption: 5W
Physics	Dimension: 378*160*98 (mm)
	Net weight: 1280g Gross weight: 1870g
Environment	Temperature: 0℃~+ 50℃
	Humidity: 0~95%(Non-condensation)
Communication	Type of connection: six plugs & DB9 electrical outlet & RJ45
	Type of interface: RS485/422 & RS-232
	Baud rate: 2400/4800/9600/19200 bps
	Transmitting distance: 1200m (RS485 & RS422, 0.5mm twisted pair cable)

Dimension:

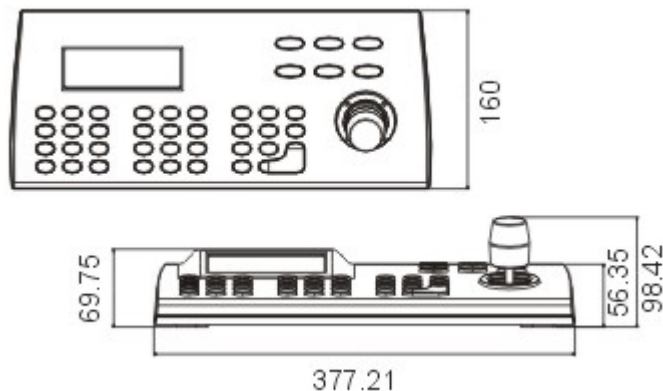

K.S.R. ELECTRONICS CO., LTD.

1072 Lardphao Rd., Samsennok, Huaykwang, Bangkok 10320
 Tel : 0-2939-8383 Fax : 0-2513-6040
 email : ksrelectronics@yahoo.com